



CELLO® 461/O CB-01

Noise-absorbing PUR foam, surface sealed with a black film. Highly suitable for all uses where the absorber has to be protected against the penetration of liquids, e.g. in engine compartments.

- Option 1: CB-01 » upper face and edges sealed
- Option 2: CB-01/2 » all surfaces sealed

Applications: Buses/utility vehicles, construction and farm machinery, machine construction




TECHNICAL DATA

FLAMMABILITY	<ul style="list-style-type: none"> ▶ FMVSS 302, DIN 75 200, fulfilled ▶ ISO 3795, burning rate < 100 mm/min ▶ ECE-R 118, annexes 6, 7 and 8 fulfilled (10 mm, SK)
TEMPERATURE RESISTANCE	-40°C to +100°C
THERMAL CONDUCTIVITY PUR FOAM / EN 12667	≤ 0.040 W/(m·K) at 10°C
DENSITY PUR-FOAM / DIN EN ISO 845	23 kg/m ³
TIGHTNESS / UNE 53-335-78	Diesel, oil and water coming into contact with the surface cannot seep into the mat.

Thicknesses: 10, 20, 30, 40 and 50 mm. Other thicknesses on request. Ready-to-use parts according to your specifications or drawing.

IMPEDANCE TUBE / DIN 10 534-2

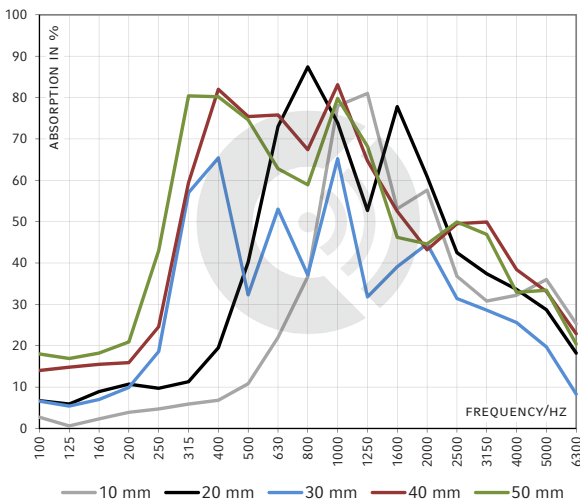

- BENEFITS**
- ▶ Broad absorption bandwidth
 - ▶ Sealed surface impermeable to oil, water and fuel
- OPTIONEN**
- 461/O CB-01 NK: no self-adhesive equipment
 - 461/O CB-01 SK: with self-adhesive finish
 - 461/O CB-01/2 NK: all surfaces sealed, no self-adhesive finish
 - 461/O CB-01/2 SK: all surfaces sealed, strips of self-adhesive tape on rear face