




CELLO® BMN-03

Weatherproof anti-skid cover mat for high-traffic floor areas.

The homogeneous black rubber mat with textured surface provides good sound insulation and vibration damping.

Applications: buses/utility vehicles, machine construction, cabins/casings/hoods, for cabins of construction and farm machinery, for walk-on areas in factories

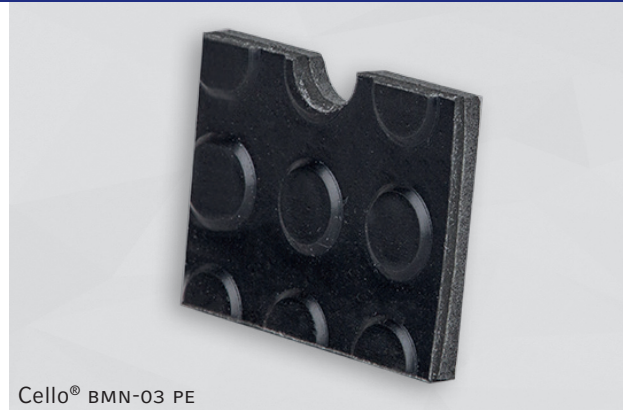

Cello® BMN-03 PE

TECHNICAL DATA

FLAMMABILITY	<ul style="list-style-type: none"> ▶ FMVSS 302, DIN 75 200, fulfilled ▶ ISO 3795, burning rate < 100 mm/min ▶ ECE R-118, annexes 6 fulfilled (BMN-03 NK)
TEMPERATURE RESISTANCE	Long-term: -30°C to +80°C Short-term: -30°C to +90°C
HARDNESS	65 ± 5° Shore A
WEIGHT	4.6 kg/m ²

DIMENSIONS

PRODUCT	THICKNESS [mm]	THICKNESS TOLERANCE [mm]	SHEETS* [mm]	ROLLS*, ONLY NK
BMN-03	4	± 1	1500 X 1050 or 2100 X 1500	Length: 10.5 m Width: 1500 mm
BMN-03 PE	9 to 40	± 1.5 to ± 2.5 depending on thickness	1500 X 1050 or 2100 X 1500	not available

Other thicknesses / dimensions on request. Ready-to-use parts according to your specifications or drawing.

*Untrimmed: Effective dimensions guaranteed as ordered, may be exceeded by some layers (foam, film, non-woven etc.).

MORE INFORMATION

BENEFITS	<ul style="list-style-type: none"> ▶ Excellent durability ▶ Good resistance against soiling by oil or fuel ▶ PVC-free ▶ Easy installation
OPTIONS	BMN-03 NK: no self-adhesive equipment BMN-03 PE NK: floor mat with PE foam, for optimum insulation and comfortable footfall BMN-03 PE SK: same as BMN-03 PE NK, but with a self-adhesive finish in addition (facilitates installation)